

300-5122

POWER CLEAN 2.0



300-5122 Power Clean 2.0, 2.1 gpm @ 1100 PSI
Power Rating: 120vAC/20A Dedicated Circuit for each unit

FEATURES:

- » 2HP Industrial Motor , Totally-Enclosed, Fan-Cooled
- » 2.1 GPM, 3 Cylinder, Stainless Steel Lined, Ceramic Plunger Pump
- » SSR w/ Integrated LED for Basic System Status
- » Anti-Backflow/Anti-Siphon Protection w/ 1" Air Gap via Water Level Float Tank
- » Low Water Shut-Off protection
- » Thermal Limit Switch for Over Temp Protection (150° Max Water Temp)
- » Includes 36" Dual Nozzle Spray Gun w/ Three High Pressure Nozzles
- » Includes Water Filter Assembly, Replacement Filter Cartridge, and Oil
- » Unit Comes Ready to Wire. **Does Not include Power Cord.**
- » Shipping Weight: 266 lbs




(800) 548-3373

www.spraymastertech.com

A brand line of
Assembled Products Corporation

115 E Linden • Rogers, Arkansas 72756 USA | Office: (479) 636-5776 • Fax: (479) 636-3245



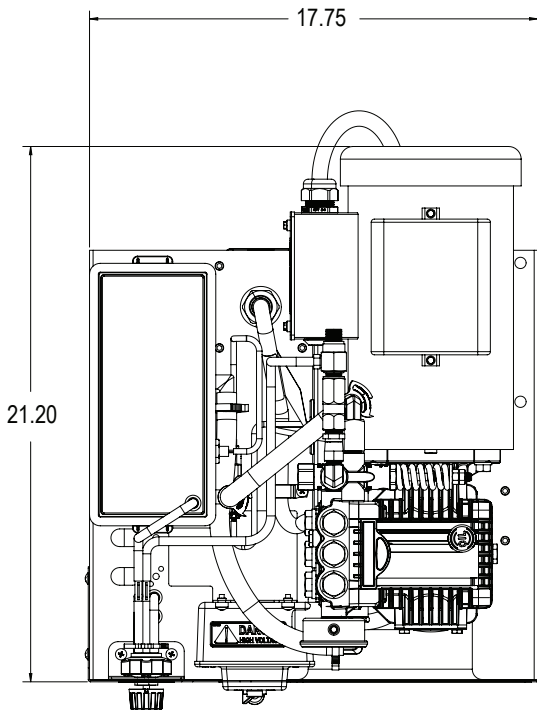

EQUIPMENT SPECS:

CLEARANCES

- » Left Side 10"
- » Right Side 10"
- » Overhead 21"
- » Above Finished Floor 36"
- » Front 16"

PLUMBING

3/4" / 2cm Hose Bib with 5 gpm / .14Lpm @ Min. 30 to 80 psi / 20.6 to 5.5 bars. If Warm Water is required, 150° F / 65.5° C Max.

ELECTRICAL

One (1) 120v 60Hz, Single Phase 20A, GFCI Protected 'Dedicated Circuit'

CHEMICAL DILUTION

Dual Chemical Metering Valves accurately adjust chemical metering to your chemical specifications.

INSTALLATION SPECS:

ELECTRICAL

One (1) 120v 60Hz, Single Phase 20A, GFCI Protected 'Dedicated Circuit'

WATER

One (1) water outlet with standard 3/4" / 1.9cm hose bib with shut-off valve. A pressure gauge in the water line can be helpful although it is not mandatory. A minimum of 5 gal / 19L per minute and a line pressure not less than 30 psi / 20.6 bars, and not more than 80psi / 5.5 bars, is required.

(Option: if warm water outlet is needed - 150° F / 65.5° C MAX)


LOCATION

Heated utility room or closet with ventilation. Minimum 24" / 60.96cm clearance above unit is required. The unit can be serviced without removing it from the wall.

GENERAL RECOMMENDATIONS

Floor drains are essential in new facilities to receive the greatest utilization and maximum efficiency of your **Spray Master** pressure washer. Materials and wall coverings which can be cleaned with pressurized water are desirable. Locate electrical outlets above washing areas.

5122, 120V, SINGLE UNIT ON WALL MOUNT BRACKETS



SYSTEM REQUIREMENTS:

- » One (1) 120v 60Hz, Single Phase 20A, GFCI Protected Dedicated Circuit, for each unit
- » 3/4" Backing required in studded walls

NOTE: Electrical, Water, and Backing are not supplied by Spray Master.

AMBIENT WATER SUPPLY

Recommended Temp: Cold water, 5 gpm @ minimum (30-60 psi) with a maximum of 80 PSI with 3/4" Hose Bib (*one for each unit*)

Maximum Temp: 150° F / 65.5 C, 5 gpm @ minimum (30-60 psi) with a maximum of 80 psi with a 3/4" Hose Bib (*one for each unit*)



www.spraymastertech.com